



S A B E D E L L A N T A S



FORCE >>



DOMINANDO EL TERRITORIO



Index

AGRICULTURAL TYRES

Tractor Radial Tyres - 80& 85 Series	01
Row Crop Radial Tyres - 90 & 95 Series	02
Bias Tractor Rear Tyres	03
Bias Tractor Front Tyres	05
Irrigation Drive R-1 Tyres	06
Bias Row Crop Farming Tyres	07
Farming & Highway Service Implement Tyres	08
Drive Wheel Tyres	08
Agricultural Implement Tyres	09
All Terrain Traction Tyres	11
Flotation Implement Tyres	12
Forestry Tyres	13
Agriculture Trailer & Vintage Vehicle Tyres	17
Lawn & Garden Tyres	19
Golf Cart Tyres	19
Sports Ground Tyres	19

INDUSTRIAL TYRES

Skid Steer Tyres	21
Drive Wheel (R-3) Tyres	24
Excavator Tyres	24
Industrial Tractor Tyres	25
Earthmover Tyres	26
Industrial & Lift Truck Tyres	26
Multi Purpose Truck (MPT) Tyres	27
Compactor Tyres	28
Grader (G2) Tyres	28

TRUCK & LIGHT TRUCK TYRES

30

MILITARY JEEP 4X4 TYRES

32

THREE WHEELER TYRES

32

TWO WHEELER TYRES

33

TRACTOR RADIAL TYRES

80 & 85 SERIES

- Radial tyre with balanced characteristics for a wide range of applications both in the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE	
				(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	40KPH / 25MPH MAX LOAD		50KPH / 30MPH MAX LOAD		(bar)	(psi)
				(kg)	(lbs)	(kg)	(lbs)	(kg)	(lbs)	(kg)	(lbs)	(kg)	(lbs)	(kg)	(lbs)	(kg)	(lbs)		
24" (REPLACES 11.2R-24) 122 A8/B	R1	W10 W9 W11	TUBELESS	282	11.1	1086	42.8	508	20.0	3429	135.0	41	51	1500	3300	1360	2990	1.60	23
340/85R-24 (REPLACES 13.6 R-24) 125 A8/B	R1	W11 W12	TUBELESS	343	13.5	1188	46.8	533	21.0	3531	139.0	44	55	1650	3630	1500	3300	1.60	23
320/85R-28 (REPLACES 12.4 R-28) 124 A8/B	R1	W10 W9 W11	TUBELESS	319	12.6	1255	49.4	559	22.0	3734	147.0	42	53	1600	3520	1450	3190	1.60	23
380/85R-28 (REPLACES 14.9 R 28) 133 A8/B	R1	W12 W11 W13	TUBELESS	380	15.0	1357	53.4	610	24.0	4013	158.0	45	56	2086	4590	1905	4190	1.60	23
420/85R-28 (REPLACES 16.9 R-28) 139 A8/B	R1	W13 W14 W15	TUBELESS	418	16.5	1425	56.1	635	25.0	4242	167.0	49	61	2430	5345	2240	4930	1.60	23
380/85R-30 (REPLACES 14.9 R-30) 135 A8/B	R1	W12 W11 W13	TUBELESS	380	15.0	1408	55.4	629	24.8	4151	163.5	45	56	2180	4795	2050	4510	1.60	23
420/85R-30 (REPLACES 16.9 R-30) 140 A8/B	R1	W13 W14 W15	TUBELESS	418	16.5	1476	58.1	660	26.0	4394	173.0	49	61	2500	5500	2300	5060	1.60	23
380/85R-34 (REPLACES 14.9 R-34) 137 A8/B	R1	W12 W11 W13	TUBELESS	380	15.0	1810	59.4	686	27.0	4470	176.0	45	56	2300	5060	2180	4795	1.60	23
420/85 R 34 (REPLACES 16.9 R 34) 142 A8/B	R1	W13 W14 W15	TUBELESS	418	16.5	1578	62.1	711	28.0	4674	184.0	49	61	2650	5830	2550	5610	1.60	23
420/85R-38 (REPLACES 16.9 R 38) 144 A8/B	R1	W13 W14 W15	TUBELESS	418	16.5	1679	66.1	762	30.0	5003	197.0	51	64	2806	6175	2580	5675	1.60	23
460/85R-38 (REPLACES 18.4 R-38) 149 A8/B	R1	W16 W14 W15	TUBELESS	455	17.9	1747	68.8	787	31.0	5156	203.0	54	67	3256	7165	3006	6615	1.60	23
520/85R-38 (REPLACES 20.8R-38) 155 A8/B	R1	W16 W18	TUBELESS	516	20.3	1849	72.8	812	32.0	5410	213.0	57	71	3884	8545	3884	8545	1.60	23
480/80R-42 (REPLACES 18.4R-42) 151 A8/B	R1	W16	TUBELESS	479	18.9	1835	72.3	762	33.0	5461	215.0	54	68	3457	7605	3457	7605	1.40	20
520/85R-42 (REPLACES 20.8R-42) 155 A8/B	R1			UNDER DEVELOPMENT															
480/80R-46 (REPLACES 18.4R-46) 158 A8/B	R1			UNDER DEVELOPMENT															

ROW CROP RADIAL TYRES

90 & 95 SERIES

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape & angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.



SIZE	PATTERN	RIM WIDTH (inch)	TUBE TYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		
				(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	40KPH / 25MPH MAX LOAD	50KPH / 30MPH MAX LOAD	(kg)	(lbs)	(kg)	(lbs)	(bar)
32"	210/95R-32 (REPLACES 8.3R-32) 120 A8 /B	R1	W7	TUBELESS	214	8.4	1213	47.8	559	20.0	3658	144.0	31	39	1180	2596	1180	2596	46	58
	230/95R-32 (REPLACES 9.5R-32) 128 A8 /B	R1	W8	TUBELESS	228	9.0	1251	49.3	584	23.0	3759	148.0	33	41	1804	3970	1804	3970	46	58
	270/95R-32 (REPLACES 11.2R-32) 136 A8 /B	R1	W8	TUBELESS	275	10.8	1327	52.2	609	24.0	5013	158.0	34	43	2245	4940	2245	4940	46	58
36"	230/95R-36 (REPLACES 9.5R-36) 130 A8 /B	R1	W8	TUBELESS	228	9.0	1352	53.2	609	24.0	4064	160.0	33	41	1904	4190	1904	4190	46	58
	270/95R-36 (REPLACES 11.2R-36) 139 A8 /B	R1			UNDER DEVELOPMENT															
38"	270/95R-38 (REPLACES 11.2R-38) 140 A8 /B	R1			UNDER DEVELOPMENT															
	230/95R-44 (REPLACES 9.5R-44) 134 A8 /B	R1	W8	TUBELESS	228	9.0	1556	61.3	737	29.0	4699	185.0	33	41	2125	4675	2125	4675	46	58
44"	270/95R-44 (REPLACES 11.2R-44) 142 A8 /B	R1	W8	TUBELESS	275	10.8	1632	64.3	762	30.0	4902	193.0	34	43	2655	5840	2655	5840	46	58
	300/95R-46 (REPLACES 12.4R-46) 148 A8 /B	R1			UNDER DEVELOPMENT															
46"	380/90R-46 (REPLACES 14.9R-46) 148 A8 /B	R1			UNDER DEVELOPMENT															
	230/95R-48 (REPLACES 9.5-48) 136 A8 /B	R1	W8	TUBELESS	228	9.0	1657	65.2	1656	31.0	4978	196.0	33	41	2245	4940	2245	4940	46	58
48"	270/95R-48 (REPLACES 11.2R-48) 144 A8 /B	R1	W8	TUBELESS	275	10.8	1733	68.2	812	32.0	5257	207.0	34	43	2806	6175	2806	6175	46	58

BIAS TRACTOR REAR TYRES

- Deep Tread and excellent tread wear and durability.
- Designed to deliver power to the ground.
- Design offers maximum cleaning and sidehill slip resistance.



BIAS TRACTOR

FRONT TYRES

- Penetrates deep into soil for maximum steering control & minimal lateral side-slip because of its high center rib.
- Best for handling heavy loads on hard-packed surfaces.
- Offers excellent load distribution and flotation.



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
6"	3.50-6	F2	4	2.5	TUBETYPE	101	3.9	345	13.5	214	8.4	1340	52.8	10	13	165	375	2.7	38
8"	3.50-8	F2	4	2.5	TUBETYPE	101	4.0	372	14.6	218	8.6	1390	54.7	9	11	185	400	2.7	38
8"	4.00-8	F2	4	3.0	TUBETYPE	112	4.4	430	16.9	224	8.8	1430	56.3	9	11	225	500	2.8	40
12"	4.00-12	F2	4	3.0	TUBETYPE	112	4.4	530	20.8	254	10.0	1626	64.0	10	13	300	650	2.8	40
15"	4.00-15	F2	4	3.0	TUBETYPE	112	4.4	610	24.0	295	11.6	1854	73.0	8	10	350	775	3.1	44
	5.00-15	F2	6	4.0	TUBETYPE	140	5.5	655	25.7	305	12.0	1956	77.0	12	15	365	800	3.5	50
		F2M B	4	3.0	TUBETYPE	140	5.5	655	25.7	305	12.0	1956	77.0	14	15	365	800	3.5	50
		F2 B	6	4.0	TUBETYPE	140	5.5	655	25.7	305	12.0	1956	77.0	14	15	365	800	3.5	50
16"	4.00-16	F2	4	3.0	TUBETYPE	112	4.4	640	25.2	305	12.0	1956	77.0	10	13	290	650	3.1	44
		F2M B	4	3.0	TUBETYPE	112	4.4	640	25.2	305	12.0	1956	77.0	10	13	290	650	3.1	44
	4.50-16	F2	6	3.0	TUBETYPE	122	4.8	665	25.7	305	12.0	1956	77.0	10	13	365	800	3.3	47
		F2M B	6	3.0	TUBETYPE	122	4.8	665	25.7	305	12.0	1956	77.0	10	13	365	800	3.3	47
	5.00-16	F2	6	4.0	TUBETYPE	140	5.5	680	26.7	330	13.0	2032	80.0	10	13	400	875	4.2	60
		F2M B	6	4.0	TUBETYPE	140	5.5	680	26.7	330	13.0	2032	80.0	10	13	400	875	4.2	60
	5.50-16	F2	6	4.0	TUBETYPE	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	500	1100	3.7	53
		F2M B	6	4.0	TUBETYPE	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	500	1100	3.7	53
		F2 B	6	4.0	TUBETYPE	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	500	1100	3.7	53
	6.00-16	F2	8	4.5	TUBETYPE	165	6.5	745	29.3	357	14.0	2184	86.0	13	16	875	1925	4.0	57
		F2 B	8	4.5	TUBETYPE	165	6.5	745	29.3	357	14.0	2184	86.0	13	16	875	1925	4.0	57
		F2 B	8	4.5	TUBETYPE	165	6.5	745	29.3	357	14.0	2184	86.0	13	16	875	1925	4.0	57
		F2M B	8	4.5	TUBETYPE	165	6.5	745	29.3	357	14.0	2184	86.0	13	16	875	1925	4.0	57
		I1	8	4.5	TUBETYPE	165	6.5	745	29.3	357	14.0	2184	86.0	13	16	875	1925	4.0	57
	6.50-16	F2	8	4.5	TUBETYPE	175	6.8	760	29.9	357	14.0	2286	90.0	13	16	925	2050	3.8	54
		F2 B	8	4.5	TUBETYPE	175	6.8	760	29.9	357	14.0	2286	90.0	13	16	925	2050	3.8	54
		F2M B	8	4.5	TUBETYPE	175	6.8	760	29.9	357	14.0	2286	90.0	13	16	925	2050	3.8	54
	7.50-16	F2	8	5.5	TUBETYPE	205	8.0	810	31.8	381	15.0	2413	95.0	14	18	1120	2475	3.3	47
		F2 B	8	5.5	TUBETYPE	205	8.0	810	31.8	381	15.0	2413	95.0	14	18	1120	2475	3.3	47
		F2M B	8	5.5	TUBETYPE	205	8.0	810	31.8	381	15.0	2413	95.0	14	18	1120	2475	3.3	47
		F2M B	12	5.5	TUBETYPE	205	8.0	810	31.8	381	15.0	2413	95.0	14	18	1350	2970	4.0	57
	9.00-16	F2	10	6.0	TUBETYPE	234	9.2	855	33.6	406	16.0	2540	100.0	15	19	1250	2750	3.9	55
	10.00-16	F2	10	6.0	TUBETYPE	275	10.8	900	35.4	406	16.0	2692	106.0	18	23	1360	3000	3.4	48
	11.00-16	F2	12	8.0	TUBETYPE	320	12.6	970	38.1	457	18.0	2896	114.0	23	29	1600	3525	4.2	60
18"	6.00-18	F2M B	8	4.5	TUBETYPE	165	6.5	795	31.3	457	14.6	2340	92.1	11	14	710	1575	3.3	47
	7.50-18	F2	8	5.5	TUBETYPE	205	8.0	870	34.2	406	16.0	2565	101.0	14	18	950	2100	3.7	53

SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
19"	F2M	8	5.5	TUBETYPE	205	8.0	870	34.2	406	16.0	2565	101.0	14	18	950	2100	3.7	53
	F2M B	8	5.5	TUBETYPE	205	8.0	870	34.2	406	16.0	2565	101.0	14	18	950	2100	3.7	53
	F2	4	3.0	TUBETYPE	112	4.4	712	28.1	330	13.0	2134	84.0	10	13	355	775	3.4	48
	F2	8	4.5	TUBETYPE	165	6.5	814	32.0	381	15.0	2413	95.0	12	15	750	1650	3.4	48
20"	F2M B	8	4.5	TUBETYPE	165	6.5	814	32.0	381	15.0	2413	95.0	12	15	750	1650	3.4	48
	F2	8	4.5	TUBETYPE	175	6.8	865	34.0	406	16.0	2565	101.0	15	19	810	1800	3.1	44
	F2M B	8	4.5	TUBETYPE	175	6.8	865	34.0	406	16.0	2565	101.0	15	19	810	1800	3.1	44
	I1 B	8	4.5	TUBETYPE	175	6.8	865	34.0	406	16.0	2565	101.0	16	20	909	2000	3.4	48
	F2 B	8	4.5	TUBETYPE	203	8.0	920	36.2	432	17.0	2718	107.0	16	20	1050	2310	3.4	48
7.50-20	F2	8	5.5	TUBETYPE	203	8.0	920	36.2	432	17.0	2718	107.0	16	20	1030	2275	3.4	48
	F2M B	8	5.5	TUBETYPE	203	8.0	920	36.2	432	17.0	2718	107.0	16	20	1030	2275	3.4	48
	I1 C	8	5.5	TUBETYPE	203	8.0	942	37.1	442	17.4	2718	107.0	19	24	910	2000	2.4	34

IRRIGATION DRIVE

R-1 TYRES

- Designed for irrigation service with minimal soil compaction & excellent wear.
- Long service life thanks to the use of a wear resistant tread compound.



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE			
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)		
24"	11.2-24	R1 J	6	10.0	TUBETYPE	284	11.2	1105	43.5	508	20.0	3200	126.0	26	33	825	1815	1.3	18	
		TUBELESS	284	11.2	1105	43.5	508	20.0	3200	126.0	26	33	825	1815	1.3	18				
	11.2-24	R1 J	8	10.0	TUBETYPE	284	11.2	1105	43.5	508	20.0	3200	126.0	26	33	900	1980	1.3	18	
		TUBELESS	284	11.2	1105	43.5	508	20.0	3200	126.0	26	33	900	1980	1.3	18				
	12.4-24	R1 K	4	10.0	TUBETYPE	284	11.2	1105	43.5	508	20.0	3200	126.0	26	33	750	1650	1.3	18	
		TUBELESS	284	11.2	1105	43.5	508	20.0	3200	126.0	26	33	750	1650	1.3	18				
	38"	11.2-38	R1 L	6	11.0	TUBETYPE	315	12.4	1170	46.1	508	20.0	3200	126.0	27	34	1100	2420	1.4	20
			TUBELESS	315	12.4	1170	46.1	508	20.0	3200	126.0	27	34	1100	2420	1.4	20			
		14.9-24	R1 J	6	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1485	3267	1.6	20
			TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1485	3267	1.6	20			
		14.9-24	R1 J	8	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1620	3564	1.4	23
			TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1620	3564	1.4	23			
14.9-24		R1 J	8	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1620	3564	1.4	23	
		TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1620	3564	1.4	23				
14.9-24		R1 K	4	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1250	2750	1.6	20	
		TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1250	2750	1.6	20				
14.9-24		R1 K	6	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1350	2970	1.4	23	
		TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	30	38	1350	2970	1.4	23				
14.9-24	R1 L	4	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	29	36	1250	2750	1.4	20		
	TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	29	36	1250	2750	1.4	20					
14.9-24	R1 L	6	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	29	36	1350	2970	1.4	23		
	TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	29	36	1350	2970	1.4	23					
38"	11.2-38	R1 L	6	13.0	TUBETYPE	378	14.9	1265	49.8	584	23.0	3658	144.0	29	36	1350	2970	1.6	23	
		TUBELESS	378	14.9	1265	49.8	584	23.0	3658	144.0	29	36	1350	2970	1.6	23				
	11.2-38	R1 J	6	10.0	TUBETYPE	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1425	3135	1.6	30	
		TUBELESS	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1425	3135	1.8	30				
	11.2-38	R1 J	8	10.0	TUBETYPE	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1554	3419	1.8	30	
		TUBELESS	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1554	3419	1.8	30				
	11.2-38	R1 J	8	10.0	TUBETYPE	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1554	3419	1.8	30	
		TUBELESS	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1554	3419	1.8	30				
11.2-38	R1 K	6	10.0	TUBETYPE	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1295	2850	1.6	30		
	TUBELESS	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1295	2850	1.8	30					
11.2-38	R1 K	8	10.0	TUBETYPE	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1380	3036	2.1	30		
	TUBELESS	284	11.2	1465	57.6	693	27.3	4343	171.0	30	38	1380	3036	2.1	30					

BIAS ROW CROP

FARMING TYRES

- Excellent traction and directional stability.
- Deep lugs, low slip and optimized rubber compounds help reduce wear to give exceptionally long tire life.



	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
19"	4.50-19	R1I	6	3.0	TUBETYPE	122	4.8	736	28.9	343	13.5	2145	84.5	15	19	487	1075	4.5	64
21"	4.00-21	R1M	4	3.0	TUBETYPE	115	4.5	765	30.0	350	13.8	2247	88.5	6	8	180	396	1.8	25
	5.00-21	R1I	6	4.0	TUBETYPE	140	5.5	824	32.4	360	14.2	2310	91.0	10	13	435	957	2.8	39
28"	8.3-28	R1I	6	7.0	TUBETYPE	211	8.3	1095	43.1	533	21.0	3251	128.0	27	34	875	1925	2.4	34
	9.5-28	R1I	8	8.0	TUBETYPE	241	9.5	1156	45.2	543	21.4	3350	132.0	28	35	1110	2445	2.8	40
30"	4.00-30	R1I	4	3.0	TUBETYPE	116	4.5	995	39.1	457	18.0	2938	115.7	12	15	350	770	1.3	18
	7.2-30	R1I	6	6.0	TUBETYPE	183	7.2	1095	43.1	533	21.0	3225	127.5	27	34	690	1525	2.3	33
	9.5-30	R1I	8	8.0	TUBETYPE	241	9.5	1200	47.2	559	22.0	3531	139.0	29	36	1215	2673	2.8	40
32"	8.3-32	R1I	8	7.0	TUBETYPE	211	8.3	1193	47.0	584	23.0	3581	141.0	30	38	920	2025	2.4	34
	9.5-32	R1I	10	8.0	TUBETYPE	241	9.5	1255	49.4	584	23.0	3683	145.0	30	38	1430	3150	3.5	50
36"	4.00-36	R1M	4	3.0	TUBETYPE	120	4.7	1140	44.9	524	20.6	3364	132.5	6	8	375	825	2.4	34
	4.00-36	R1I	4	3.0	TUBETYPE	120	4.7	1140	44.9	524	20.6	3364	132.5	12	15	375	825	2.4	34
	4.50-36	R1I	6	3.0	TUBETYPE	135	5.3	1150	45.2	530	20.9	3402	134.0	12	15	450	990	2.5	35
	5.00-36	R1I	6	3.0	TUBETYPE	145	5.7	1175	46.2	540	21.3	3456	136.0	12	15	460	1012	2.5	35
	7.2-36	R1I	8	6.0	TUBETYPE	183	7.2	1255	49.4	610	24.0	3810	150.0	30	38	1005	2200	3.7	53
	8.3-36	R1I	8	7.0	TUBETYPE	211	8.3	1293	50.9	610	24.0	3810	150.0	30	38	975	2150	2.4	34
	9.5-36	R1I	8	8.0	TUBETYPE	241	9.5	1359	53.5	623	24.5	4000	157.5	31	39	1375	3025	2.8	40
	12.4-36	R1I	6	11.0	TUBETYPE	315	12.4	1465	57.7	686	27.0	4318	170.0	28	35	1750	3850	2.3	33
38"	8.3-38	R1I	8	7.0	TUBETYPE	211	8.3	1350	53.1	621	24.5	3986	157.0	31	39	1250	2750	3.5	50
	9.5-38	R1I	8	8.0	TUBETYPE	241	9.5	1405	55.3	646	25.5	4147	163.3	31	39	1800	3950	3.0	43
	11.2-38	R1I	6	10.0	TUBETYPE	284	11.2	1465	57.9	693	27.3	4343	171.0	30	38	1295	2850	1.8	26

FARM & HIGHWAY SERVICE

IMPLEMENT TYRES

- Offers D.O.T. compliance for approved operation at highway speeds.
- Noted for its great handling and towing characteristics.

IMP



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
15"	9.5L-15FI	FHS	12	8.0	TUBELESS	249	9.5	767	30.1	343	13.5	2260	88	9	11	1555	3420	6.3	57
	11L-15FI	FHS	12	8.0	TUBELESS	266	10.5	790	30.8	353	13.9	2336	94	10	12	1800	3960	6.3	90
	12.5-15FI	FHS	12	10.0	TUBELESS	325	12.8	838	32.1	368	14.5	2464	95	10	12	2127	4680	6.3	90

DRIVE WHEEL TYRES

R-2

- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self cleaning properties, preventing mud clogging between the lugs.
- Sidewall rubber preventing weather cracking.
- Tough tread compound to resist fast wear.

R2



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
30"	18.4-30	TR-2	8	16.0	TUBETYPE	465	18.3	1580	62.2	711	28.0	4724	186.0	80	101	2184	4805	1.4	20
34"	18.4-34	TR-2	8	16.0	TUBETYPE	465	18.3	1682	66.2	762	30.0	5029	198.0	80	101	2304	5070	1.4	20
		TR-2	8	16.0	TUBETYPE	465	18.3	1682	66.2	762	30.0	5029	198.0	80	101	3090	6800	2.2	32

AGRICULTURAL IMPLEMENT TYRES

- Low section Implement tyres offering high load capacity with minimum soil compaction.
- Ideal tyres for modern farming, suitable for both on and off-the-road applications.



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
12"	7.00-12	IMP	6	4.25	TUBELESS	185	7.3	665	26.2	305	12.0	1956	77.0	8	10	827	1820	3.4	49
	300/65-12	I1 A	8	9.0	TUBELESS	305	12.0	685	27.0	305	12.0	2007	79.0	8	10	1500	3300	3.6	51
	10.0/80-12	IMP	8	9.0	TUBELESS	264	10.4	710	28.0	305	12.0	2083	82.0	7	9	1500	3300	4.2	60
	23x10.50-12	IMP	10	9.0	TUBELESS	264	10.4	710	28.0	305	12.0	2083	82.0	7	9	1750	3850	5.0	71
		I3	6	8.5	TUBELESS	264	10.3	575	22.6	262	10.3	1697	66.8	15	19	550	1210	2.1	30
	26x12.00-12	I3	8	10.5	TUBELESS	305	12.0	660	26.0	283	11.1	1856	73.1	17	21	1375	3025	3.5	50
		I3	12	10.5	TUBELESS	305	12.0	660	26.0	283	11.1	1856	73.1	17	21	1750	3850	5.3	75
14"	9.5L-14	I1	8	7.0	TUBELESS	240	9.4	735	28.9	330	13.0	2159	85.0	6	8	1090	2400	3.0	44
	11L-14	I1	8	8.0	TUBELESS	274	10.8	746	29.4	333	13.1	2209	87.0	7	9	1125	2475	2.5	36
14.5"	200/60-14.5	I1 A	10	6.8	TUBELESS	210	8.3	610	24.0	279	11.0	1778	70.0	9	11	1150	2525	6.9	68
		I1 A	14	6.8	TUBELESS	210	8.3	610	24.0	279	11.0	1778	70.0	9	11	1215	2675	7.1	78
15"	250/65-14.5	I1 A	12	6.8	TUBELESS	260	10.2	694	27.3	279	11.0	1778	70.0	9	11	1550	3400	6.5	92
	5.90-15	I1	4	6.0	TUBELESS	152	6.0	657	25.9	295	11.6	1955	77.0	5	6	522	1150	2.5	36
	6.70-15	I1	6	6.6	TUBELESS	167	6.6	703	27.7	330	13.0	2082	82.0	5	6	727	1600	3.0	44

ALL TERRAIN TRACTION TYRES

- Traction patterns, designed for on and off-the-road use, in all weather conditions.
- Patterns are engineered to provide excellent traction to drive wheels and are suited for both implement and industrial / construction applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
6"	3.50-6	R1I	4	2.5	TUBETYPE	101	4.0	345	13.5	214	8.4	1340	52.8	10	13	165	375	2.7	38
8"	3.50-8	R1I	4	2.5	TUBETYPE	101	4.0	372	14.6	218	8.6	1390	54.7	9	11	185	400	2.7	38
	4.00-8	R1I	4	3.0	TUBETYPE	114	4.4	425	16.7	195	7.7	1251	49.3	10	13	170	375	1.6	23
10"	3.50-10	R1I	4	2.5	TUBETYPE	101	4.0	440	17.3	205	8.1	1286	50.6	10	13	250	550	3.1	44
	4.00-10	R1I	4	3.0	TUBETYPE	110	4.3	466	18.3	217	8.5	1364	53.7	10	13	300	660	3.5	50
	5.00-10	R1I	4	4.0	TUBETYPE	140	5.5	512	20.1	235	9.3	1508	59.4	10	13	250	550	1.4	20
12"	5.00-12	R1I	6	4.0	TUBETYPE	145	5.7	580	22.8	271	10.7	1731	68.1	13	16	425	950	3.8	54
	5.00-12	R1N	6	4.0	TUBETYPE	145	5.7	580	22.8	271	10.7	1731	68.1	12	15	450	990	4.2	60
	6-12	R1N	6	4.5	TUBETYPE	153	6.0	585	23.0	276	10.9	1735	68.3	16	20	345	775	2.5	36
	6.5/80-12	R1A	6	5.0	TUBETYPE	165	6.5	590	23.2	279	11.0	1753	69.0	16	20	710	1575	4.6	65
	7.00-12	R1I	6	5.0	TUBETYPE	200	7.8	683	26.8	305	12.0	2007	79.0	16	20	560	1250	2.3	33
	10.0/80-12	R1A	8	9.0	TUBELESS	264	10.4	730	28.7	329	13.0	2186	86.1	19	24	1250	2750	3.1	44
	11.0/65-12	R1A	10	9.0	TUBELESS	281	11.1	692	27.2	330	13.0	2057	81.0	21	26	1360	2992	3.6	51
15"	4.00-15	R1I	4	3.0	TUBETYPE	115	4.5	615	24.2	284	11.2	1819	71.6	14	18	260	572	3.2	45
	5.00-15	R1I	6	4.0	TUBETYPE	145	5.7	657	25.8	305	12.0	1956	77.0	15	19	600	1325	4.8	68
	6.5/80-15	R1I	6	5.0	TUBETYPE	163	6.4	663	26.1	310	12.2	1976	77.8	15	19	825	1825	4.6	65
	690X180-15	R1I	6	5.0	TUBETYPE	176	6.9	690	27.1	322	12.7	2055	80.9	15	19	810	1800	2.5	36
	7.5L-15	R1I	8	6.0	TUBETYPE	210	8.2	795	30.1	356	14.0	2286	90.0	20	25	840	1848	3.7	52
	7.00-15	R1I	8	5.5	TUBETYPE	183	7.2	715	28.0	331	13.0	2126	83.7	20	25	1050	3210	3.6	51
	7.50-15	R1I	8	6.0	TUBETYPE	208	8.1	770	30.3	359	14.1	2308	90.9	20	25	1300	2860	5.0	71
	8.0/75-15	R1I	6	6.5	TUBETYPE	199	7.8	708	27.8	326	12.8	2093	82.4	20	25	1100	2420	3.5	49
15.3"	10.0/75-15.3	R1A	10	9.0	TUBELESS	267	10.5	780	30.7	356	14.0	2286	90.0	23	29	1550	3400	3.4	48
		R1A	14	9.0	TUBELESS	267	10.5	780	30.7	3565	14.0	2286	90.0	23	29	1900	4200	5.5	78
	11.5/80-15.3	R1A	10	9.0	TUBELESS	290	11.4	867	34.1	381	15.0	2540	100.0	23	29	1950	4300	3.4	48
		R1A	14	9.0	TUBELESS	290	11.4	867	34.1	381	15.0	2540	100.0	23	29	2430	5350	4.8	68
16"	4.00-16	R1I	4	3.0	TUBETYPE	115	4.5	640	25.2	308	12.1	1932	76.1	9	11	290	640	3.1	44
	4.50-16	R1I	6	3.0	TUBETYPE	122	4.8	655	25.7	311	12.2	1952	76.9	9	11	365	800	3.3	47

	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
16"	5.00-16	R1I	6	4.0	TUBETYPE	150	5.9	710	27.9	330	13.0	2083	82.0	16	20	550	1210	3.5	50	
	6.00-16	R1I	6	4.5	TUBETYPE	170	6.6	745	29.3	330	13.0	2184	86.0	16	20	750	1650	3.5	50	
	6.50-16	R1I	8	4.5	TUBETYPE	180	7.0	765	30.1	330	13.0	2184	86.0	16	20	925	2025	3.8	54	
	7-16	R1I	6	5.5	TUBETYPE	183	7.2	740	30.2	333	13.1	2205	86.8	17	21	950	2090	2.5	36	
	7.50-16	R1I	6	5.5	TUBETYPE	190	7.5	810	31.9	381	15.0	2388	94.0	17	21	1000	2675	3.5	60	
			R1I	8	5.5	TUBETYPE	190	7.5	810	31.9	381	15.0	2388	94.0	17	21	1215	2200	4.2	50
	8-16	R1I	10	6.0	TUBETYPE	203	8.0	813	32.0	381	15.0	2362	93.0	17	21	1300	2860	1.9	27	
	8.25-16	R1I	8	6.0	TUBETYPE	229	9.0	848	33.3	354	13.9	2540	100.0	21	26	1060	2350	2.1	30	
	9.0/70-16	R1A	10	8.0	TUBELESS	226	8.8	745	29.3	354	13.9	2540	100.0	23	29	1350	2970	4.4	62	
	9.0/75-16	R1A	10	8.0	TUBELESS	229	9.0	774	30.4	355	14.0	2545	100.2	23	29	1390	3058	4.5	64	
	250/80-16	R1A	10	8.0	TUBELESS	240	9.4	816	32.1	369	14.5	2412	95.0	23	29	1460	3212	3.1	44	
	260/70-16	R1A	10	8.0	TUBELESS	257	10.1	775	30.5	356	14.0	2550	100.4	23	29	1030	2266	2.4	34	
	280/70-16	R1A	10	9.0	TUBELESS	280	11.0	807	31.7	357	14.1	2560	100.8	23	29	1120	2464	2.4	34	
9.5-16	R1A	6	7.0	TUBETYPE	241	9.4	840	33.3	358	14.1	2565	101.0	21	26	1100	2420	2.1	30		
17"	15.0/55-17	R1O	10	13.0	TUBELESS	380	14.9	872	34.3	377	14.8	2490	98.0	22	28	2120	4675	2.6	37	
		R1O	14	13.0	TUBELESS	380	14.9	872	34.3	377	14.8	2490	98.0	22	28	2575	5675	4.6	65	
19.0/45-17	R1O	14	16.0	TUBELESS	491	19.3	875	34.4	381	15.0	2565	101.0	26	33	2800	6175	2.8	40		
18"	7.50-18	R1I	6	6.0	TUBETYPE	214	8.4	854	33.6	406	16.0	2540	100.0	16	20	1285	2825	4.8	68	
	8-18	R1I	6	6.0	TUBETYPE	203	8.0	840	33.0	381	15.0	2515	99.0	16	20	1350	2970	1.9	27	
	10.5/80-18	R1A	10	9.0	TUBELESS	274	10.7	907	35.7	406	16.0	2667	105.0	23	29	1950	4300	3.7	53	
	12.5/80-18	R1A	12	9.0	TUBELESS	308	12.1	987	38.8	432	17.0	2896	114.0	23	29	2650	5850	3.7	53	
	250/80-18	R1A	10	8.0	TUBELESS	251	9.9	857	33.7	406	16.0	2667	105.0	23	29	1580	3476	3.8	54	
	275/80-18	R1A	10	8.0	TUBELESS	275	10.8	906	35.6	406	16.0	2667	105.0	23	29	1360	2992	2.4	34	
	280/70-18	R1A	10	9.0	TUBELESS	280	11.0	849	33.4	406	16.0	2667	105.0	23	29	1180	2596	2.4	34	
20"	6.50-20	R1A	8	4.5	TUBETYPE	175	6.8	865	34.0	409	16.1	2578	101.5	16	20	810	1800	3.1	44	
	7.50-20	R1A	8	6.0	TUBETYPE	214	8.4	904	35.5	432	17.0	2692	106.0	21	26	1250	2750	3.3	47	
	9.00-20	R1A	8	7.0	TUBETYPE	260	10.2	1015	39.9	466	18.3	2988	117.6	26	33	1050	2310	2.5	36	
	16.0/70-20	R1A	10	14.0	TUBELESS	418	16.4	1097	43.1	483	19.0	3226	127.0	28	35	3075	6750	3.2	45	
		R1A	14	14.0	TUBELESS	418	16.4	1097	43.1	483	19.0	3226	127.0	28	35	3750	8250	4.5	63	

FLOTATION IMPLEMENT TYRES

- Suitably designed for on and off-the-road use, in all weather conditions.
- Patterns are engineered to provide excellent traction to drive wheels & are suited for both implement & industrial / construction applications.



	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(kg)	(lbs)	(bar)	(psi)
15.5"	400/60-15.5	IMP	14	13.0	TUBELESS	400	15.7	875	34.4	381	15.0	2565	101.0	20	25	3250	7150	2750	6050	4.9	70
			18	13.0	TUBELESS	400	15.7	875	34.4	381	15.0	2565	101.0	20	25	3880	8550	3450	7590	6.3	89
22.5"	400/55-22.5	IMP	16	13.0	TUBELESS	400	15.7	1020	40.1	432	17.0	3073	121.0	29	36	3550	7810	3150	6930	4.1	58
			16	11.75	TUBELESS	400	15.7	1070	42.1	483	19.0	3226	127.0	29	36	4000	8800	3204	7050	3.6	51
	385/65-22.5	IMP	18	11.75	TUBELESS	400	15.7	1070	42.1	483	19.0	3226	127.0	29	36	4500	9900	3600	7920	4.3	62
			16	11.75	TUBELESS	385	15.2	1070	42.1	483	19.0	3226	127.0	29	36	4000	8800	3204	7050	3.6	51
	500/45-22.5	IMP	16	16.0	TUBELESS	500	19.7	1050	42.1	457	18.0	3099	122.0	35	44	3760	8272	3350	7370	3.7	52
			16	16.0	TUBELESS	500	19.7	1170	46.1	508	20.0	3480	137.0	38	48	4875	10725	4375	9625	3.2	45
	550/60-22.5	IMP	16	16.0	TUBELESS	550	21.7	1240	48.8	533	21.0	3738	147.2	38	48	5450	11990	4875	10725	2.8	40
	600/50-22.5	IMP	16	20.0	TUBELESS	600	23.6	1170	46.1	508	20.0	3505	138.0	38	48	5150	11330	4625	10175	2.6	38
	600/55-22.5	IMP	16	20.0	TUBELESS	600	23.6	1230	48.4	533	21.0	3708	146.0	38	48	5800	12760	5300	11600	2.6	38

FORESTRY TYRES

- Excellent for both Heavy Duty Agricultural and forestry applications which ensures good all-round performance in Forestry usage as well as good traction Load Capability and Durability in Agricultural / Forestry operations.
- Developed for use on powerful forestry Tractors / Machinery.
- Deep Tread lugs mean high traction at the work area.
- Long service life thanks to the use of a wear resistant tread compound.



SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS (mm) (inch)	ROLLING CIRCUM ± 2.5 % (mm) (inch)	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION												
			SW (mm) (inch)	OD (mm) (inch)						SPEED KPH / MPH				RECOMMENDED LOAD KG / LBS								
					DRIVE WHEEL								FORESTRY USE									
			STATIC	10 6	20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT												
24"	11.2-24	DW10 W10 W10H	TUBETYPE	284 11.2	1112.0 43.8	518 20.4	3346 131.7	14PR	2.0 29.0	28 35	2460	1610	1190	1140	1070	970	1070	1320				
											5420	3550	2620	2510	2360	240	2360	2900				
				2600	1700	1250	1210	1130	1030	1130	1390											
				5730	3740	2750	2670	2490	2270	2490	3060											
				32.0	5730	3740	2750	2670	2490	2270	2490	3060										
				2.4	2740	1790	1320	1270	1190	1080	1190	1460										
				35.0	6040	3940	2910	2800	2620	2380	2620	3220										
				2.6	2880	1880	1390	1340	1250	1140	1250	1540										
				38.0	6340	4140	3060	2950	2750	2510	2750	3380										
				2.8	3010	1970	1450	1400	1310	1190	1310	1610										
				41.0	6630	4340	3190	3080	2890	2620	2890	3550										
				3.0	3130	2040	1510	1460	1360	1240	1360	1670										
				44.0	6890	4490	3330	3220	3000	2730	3000	3690										
					12.4-24	DW11 W11 DW10 W10	TUBETYPE	315 12.4	1175.0 46.25	524 20.6	3407 134.1	16PR	2.5 36.0	29 36	3400	2220	1640	1580	1480	1350	1480	1820
7490	4890	3610	3480												3260	2970	3260	4010				
2.7	3570	2330	1720					1660	1550	1410	1550	1910										
39.0	7860	5130	3790					3660	3410	3110	3410	4190										
2.9	3700	2420	1790					1720	1610	1470	1610	1980										
42.0	8150	5330	3940					3790	3550	3240	3550	4370										
3.1	3860	2520	1860					1800	1680	1530	1680	2070										
45.0	8500	5550	4100					3960	3700	3370	3700	4550										
3.3	4000	2610	1930					1860	1740	1580	1740	2140										
48.0	8810	5750	4250					4100	3830	3480	3830	4710										
3.5	4140	2700	2000					1930	1800	1640	1800	2210										
51.0	9120	5950	4410					4250	3960	3610	3960	4870										
	13.6-24	DW12 W12 W11	TUBETYPE					345 13.6	121.0 47.6	542 21.3	3531 139	16PR	1.5 22.0	29 36	3080	2010	1490	1430	1340	1220	1340	1650
															6780	4430	3280	3150	2950	2690	2950	3630
				1.7	3310	2160	1600	1540	1440	1310	1440	1770										
				25.0	7290	4760	3520	3390	3170	2890	3170	3900										
				1.9	3520	2300	1700	1640	1530	1390	1530	1880										
				28.0	7750	5070	3740	3610	3370	3060	3370	4150										
				2.1	3750	2450	1810	1740	1630	1480	1630	2000										
				30.0	8260	5400	3990	3830	3590	3260	3590	4420										
				2.3	3930	2570	1900	1830	1710	1560	1710	2100										
				33.0	8660	5660	4190	4030	3770	3440	3770	4640										
				2.5	4140	2700	2000	1930	1800	1640	1800	2210										
				3.0	9120	5950	4410	4250	3960	3610	3960	4870										

SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS	ROLLING CIRCUM ± 2.5 %	PLY RATING	INFLATION PRESSURE	NSD	CONSTANT LOAD APPLICATION													
			SW	OD						SPEED KPH / MPH				RECOMMENDED LOAD KG / LBS									
			(mm) (inch)	(mm) (inch)	DRIVE WHEEL				FORESTRY USE														
			STATIC	10	20	30	40	50	10*HT	10*LT													
			6	12	19	25	31	6*HT	6*LT														
24"	14.9-24	DW13 W13	TUBETYPE	378	1245.0	562	3673	16PR	1.5	32	3610	2360	1740	1680	1570	1430	1570	1930					
				14.9	49.0	22.1	144.6		22.0	40	7950	5200	3830	3700	3460	3150	3460	4260					
				1.7	3890	2540	1880		1810	1960	1540	1690	2080										
				25.0	8570	5990	4140		3990	3720	3390	3720	4580										
				1.9	4160	2720	2010		1940	1810	1650	1810	2230										
				28.0	9160	5990	4430		4270	3990	3630	3990	4910										
				2.1	4420	2880	2130		2050	1920	1750	1920	2360										
				30.0	9740	6340	4690		4520	4230	3850	4230	5200										
				2.5	4880	3180	2350		2270	2120	1930	2120	2610										
				36.0	10750	7000	5180		5000	4670	4250	4670	5740										
				3.0	5430	3540	2620		2530	2360	2150	2360	2900										
				44.0	11960	7800	5770		5570	5200	4740	5200	6400										
				26"	18.4-26	W16L W15L	TUBETYPE		467	1440	656	4273	16PR	1.1	40	4050	2640	1950	1880	1760	1600	1760	2160
									18.4	56.7	25.8	168.2		16.0	50	8920	5810	4300	4140	3880	2520	3880	4770
1.3	4490	2930	2160					2090	1950	1770	1950	2400											
19.0	9890	6450	4760					4600	4300	3900	4300	5290											
1.5	4850	3170	2340					2260	2110	1920	2110	2600											
22.0	10680	6980	5150					4980	4650	4230	4650	5720											
1.7	5254	3420	2530					2440	2280	2070	2280	2800											
25.0	1150	7530	5570					5370	5020	4560	5020	6170											
1.9	5590	3650	2700					2600	2430	2210	2430	2990											
28.0	12310	8040	5950					5730	5350	4870	5350	6580											
2.1	5920	3860	2860					2760	2575	2340	2575	3170											
30.0	13040	8500	6300					6080	5670	5150	5670	6970											
28"	13.6-28	DW12 W12 W12D	TUBETYPE					345	1320	596	3863	16PR		1.5	36	3240	2120	1570	1510	1410	1280	1410	1730
								13.6	51.9	23.4	152.1			22.0	45	7140	4670	3460	3330	3110	2820	3110	3830
				1.7	3500	2280	1690	1630	1520	1380	1512		1870										
				25.0	7710	5020	3720	3590	3350	3040	3350		4120										
				1.9	3730	2430	1800	1730	1620	1470	1620		1990										
				28.0	8220	5350	3960	3810	3570	3240	3570		4390										
				2.1	3960	2580	1910	1840	1720	1570	1720		2120										
				30.0	8720	5680	4210	4050	3790	3460	3790		4660										
				2.3	4160	2720	2010	1940	1810	1650	1810		2230										
				33.0	9160	5990	4430	4270	3990	3630	3990		4910										
				2.5	4370	2850	2110	2030	1900	1730	1900		2340										
				36.0	9630	6280	4650	4470	4190	3810	4190		5150										
				14.9-28	DW13 W13 W12D W12	TUBETYPE	TUBETYPE	378	1365	618	4019		16PR	1.5	33	3840	2510	1850	1790	1670	1520	1670	2050
								14.9	53.7	24.3	158.2			22.0	41	8460	5530	4070	3940	3680	3350	3680	4530
1.7	4120	2690	1990					1920	1790	1630	1790	2200											
25.0	9070	5930	4380					4230	3940	3590	3940	4850											
1.9	4390	2870	2120					2040	1910	1740	1910	2350											
28.0	9670	6320	4670					4490	4210	3830	4210	5180											
2.1	4670	3050	2250					2170	2030	1850	2030	2500											
30.0	10290	6720	4960					4780	4470	4070	4470	5500											
2.5	5180	3380	2500					2410	2250	2050	2250	2770											
36.0	11410	7440	5510					5310	4960	4520	4960	6100											
3.0	5750	3750	2780					2680	2500	2280	2500	3080											
44.0	12670	8260	6120					5900	5510	5020	5510	6780											
16.9-28	DW15L W15 W14L DW14	TUBETYPE	TUBETYPE					429	1440	645	4207	16PR		1.5	38	4740	3090	2290	2200	2060	1870	2060	2530
								16.9	56.7	25.4	165.6			22.0	48	10440	6810	5040	4850	4540	4120	4540	5580
				1.7	5080	3320	2450	2360	2210	2010	2210		2720										
				25.0	11190	7310	5400	5200	4870	4430	4870		5990										
				1.9	5430	3540	2620	2530	2360	2150	2360		2900										
				28.0	11960	7800	5770	5570	5200	4740	5200		6400										
				2.1	5750	3750	2780	2680	2500	2280	2500		3080										
				30.0	12670	8260	6120	5900	5510	5020	5510		6780										
				2.5	6370	4160	3070	2960	2770	2520	2770		3410										
				36.0	14030	9160	6760	6520	6100	5550	6100		7500										
				2.7	6670	4350	3220	3100	2900	2640	2900		3570										
				39.0	14690	9580	7090	6830	6390	5810	6390		7860										

SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS	ROLLING CIRCUM ± 2.5 %	PLY RATING	INFLATION PRESSURE	NSD	CONSTANT LOAD APPLICATION										
			SW	OD						SPEED KPH / MPH				RECOMMENDED LOAD KG / LBS						
			(mm) (inch)	(mm) (inch)	DRIVE WHEEL				FORESTRY USE											
			(mm) (inch)	(mm) (inch)	10 6	20 12		30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT								
30"	16.9-30	DW15L W15 W14L DW14	TUBETYPE	429	1485	684	4426	2.0	38	5800	3780	2800	2700	2520	2990	2520	3100			
				16.9	58.5	26.9	174.3	29.0	48	12780	8330	6170	5950	5550	5040	5550	6830			
				2.2	6120	3990	2950	2850	2660	2420	2660	3270								
				32.0	13480	8790	6500	6280	5860	5330	5860	7210								
				2.4	6440	4200	3110	3000	2800	2550	2800	3440								
				35.0	14190	9250	6850	6610	6170	5620	6170	7590								
				2.7	6900	4500	3330	3210	3000	2730	3000	3690								
				39.0	15200	9910	7330	7070	6610	6010	6610	8130								
				18.4-30	W16L DW16L W15L DW15L	TUBETYPE	467	1560	712	4618	1.6	38	5980	3900	2890	2780	2600	2370	2600	3200
							18.4	61.4	28	181.8	23.0	48	13170	8590	6370	6120	5730	5220	5730	7050
1.8	6390	4170	3090				2970	2780	2530	2780	3420									
26.0	14070	9190	6810				6540	6120	5570	6120	7530									
2.0	6810	4440	3290				3170	2960	2690	2960	3640									
29.0	15000	9780	7250				6980	6520	5930	6520	8020									
2.2	7200	4700	3470				3550	3130	2850	3130	3850									
32.0	15860	10350	7640				7380	6890	6280	6890	8470									
2.4	7570	4940	3650				3520	3290	2990	3290	4050									
35.0	16670	10880	8040				7750	7250	6590	7250	8920									
2.6	7940	5180	3830	3690	3450	3140	3450	4240												
38.0	17490	11410	8440	8130	7600	6290	7600	9350												
34"	16.9-34	DW15 W15L W14L	TUBETYPE	429	1590	722	4693	1.5	40	5130	3350	2480	2390	2230	2030	2230	2740			
				16.9	62.6	28.4	184.8	22.0	50	11300	7380	5460	5260	4910	4470	4910	6040			
				1.7	5500	3590	2650	2560	2390	2170	2390	2940								
				25.0	12110	7910	5840	5640	5260	4780	5260	6470								
				1.9	5890	3840	2840	2740	2560	2330	2560	3150								
				28.0	12970	8460	6260	6040	5640	5130	5640	6940								
				2.1	6230	4070	3010	2900	2710	2470	2710	3330								
				30.0	13720	8960	6630	6390	5970	5440	5970	7340								
				2.3	6580	4290	3170	3060	2860	2600	2860	3520								
				33.0	14490	9450	6980	6740	6300	5730	6300	7750								
2.5	6900	4500	3330	3210	3000	2730	3000	3690												
36.0	15200	9910	7330	7070	6610	6010	6610	8130												
34"	18.4-34	W16L DW16 W15L DW15L	TUBETYPE	467	1671	750	4914	1.5	38	6390	4170	3090	2970	2780	2530	2780	3420			
				18.4	65.8	29.5	193.5	22.0	48	14070	9190	6810	6540	6120	5570	6120	7530			
				1.7	6880	4490	3320	3200	2990	2720	2990	3680								
				25.0	15150	9890	7310	7050	6590	5990	6590	8110								
				1.9	7340	4790	3540	3410	3190	2900	3190	3920								
				28.0	16170	10550	7800	7510	7030	6390	7030	8650								
				2.1	7800	5090	3760	3630	3390	3080	3390	4170								
				30.0	17180	11210	8280	8000	7470	6780	7470	9190								
				2.3	8210	5360	3960	3820	3570	3250	3570	4390								
				33.0	18080	11810	8270	8410	7860	7160	7860	9670								
2.5	8630	5630	4160	4010	3750	3410	3750	4610												
36.0	19010	12400	9160	8830	8260	7510	8260	10160												
38"	16.9-38	W15L DW15 W14L	TUBETYPE	429	1675	772	5007	1.6	40	5640	3680	2720	2620	2420	2230	2450	3010			
				16.9	65.9	30.4	197.1	23.0	50	12420	8110	5990	5770	5400	4910	5400	6640			
				1.8	6030	3930	2910	2800	2620	2380	2620	3220								
				26.0	13280	8660	6410	6170	5770	5240	5770	7100								
				2.0	6420	4190	3100	2990	2790	2540	2790	3430								
				29.0	14140	9230	6830	6590	6150	5590	6150	7560								
				2.2	6790	4430	3270	3160	2950	2680	2950	3630								
				32.0	14960	9760	7200	6960	6500	5900	6500	8000								
				2.4	7130	4650	3440	3320	3100	2820	3100	3810								
				35.0	15700	10240	7580	7310	6830	6210	6830	8400								
2.6	7480	4880	3610	3480	3250	2960	3250	4000												
38.0	16480	10750	7950	7670	7160	6520	7160	8810												

SIZE	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	UNLOADED DIMENSION		STATIC LOADED RADIUS	ROLLING CIRCUM ± 2.5 %	PLY RATING	INFLATION PRESSURE	NSD	CONSTANT LOAD APPLICATION								
			SW	OD						SPEED KPH / MPH				RECOMMENDED LOAD KG / LBS				
			(mm)	(mm)	DRIVE WHEEL					FORESTRY USE								
			(inch)	(inch)	10	20				30	40	50	10*HT	10*LT				
38"	18.4-38	W16L 16DD W16A DW15L	467	1768	813	5217	16PR	1.5	38	6600	4310	3190	3070	2870	2610	2870	3530	
										14540	9490	7030	6760	6320	5750	6320	7770	
										7110	4640	3430	3310	3090	2810	3090	3800	
										25.0	15660	10220	7560	7290	6810	6190	6810	8380
										1.9	7590	4950	3660	3530	3300	3000	3300	4060
										28.0	16720	10900	8060	7780	7270	6610	7270	8940
										2.1	8050	5250	3890	3750	3500	3191	3500	4310
										30.0	17730	11560	8570	8260	7710	7030	7710	9480
										2.3	8490	5540	4100	3950	3690	3360	3690	4540
										33.0	18700	12200	9030	8700	8130	7400	8130	10000
										2.5	8910	5810	4300	4150	3875	3530	3875	4770
										36.0	19630	12800	9470	9140	8540	7780	8540	10500



FORESTRY

AGRICULTURE TRAILER & VINTAGE VEHICLE TYRES

HWY



HWY A



HWY B



HWY C



HWY D



HWY E



HWY F



HWY G





	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)

AGRICULTURE TRAILER TYRES

8"	4.80-8	HWY	6	3.8	TUBETYPE	122	4.8	420	16.5	8	10	335	745	6.3	89.0
	5.70-8	HWY	8	4.5	TUBETYPE	150	5.9	467	18.3	8	10	488	1075	7.1	100.0
10"	4.50-10	HWY A	6	3.5	TUBETYPE	131	5.2	490	19.3	10	13	400	880	4.4	62.0
	5.00-10	HWY A	8	3.5	TUBETYPE	135	5.3	510	20.0	10	13	580	1275	4.6	65.0
12"	145-10	HWY A	6	3.5	TUBETYPE	140	5.5	500	19.7	8	10	355	780	4.3	61.0
	7.50-10	HWY H	10	5.5	TUBETYPE	207	8.1	645	25.3	10	13	1380	3035	7.1	100.0
	4.80-12	HWY A	6	3.8	TUBETYPE	126	5.0	526	20.7	7	9	450	990	6.3	89.0
13"	5.30-12	HWY B	6	4.3	TUBETYPE	135	5.3	550	21.6	7	9	475	1045	5.6	79.0
	5.65-12	HWY B	6	4.0	TUBETYPE	140	5.5	520	20.5	7	9	275	605	2.2	31.0
	145D-12	HWY B	8	4.0	TUBETYPE	140	5.5	540	21.2	8	10	375	825	2.3	32.0
	155D-12	HWY B	6	4.5	TUBETYPE	155	6.1	558	22.0	10	13	485	1067	3.6	51.0
	155D-12	HWY B	10	4.5	TUBETYPE	155	6.1	558	22.0	10	13	625	1375	6.3	98.0
14"	5.60-13	HWY C	6	4.0	TUBETYPE	154	6.1	595	23.4	6	8	385	847	2.2	31.0
	165D-13	HWY C	6	4.5	TUBETYPE	165	6.5	596	23.5	6	8	475	1045	2.8	40.0
15"	E78-14	HWY D	6	5.5	TUBETYPE	189	7.4	656	25.8	11	14	726	1595	3.5	50.0
	175D-14	HWY D	6	5.0	TUBETYPE	178	7.0	656	25.8	11	14	615	1355	3.1	44.0
	5.90-15	HWY B	8	4.0	TUBETYPE	150	5.9	670	26.4	6	8	460	1012	2.0	28.0
16"	F78-15	HWY E	6	5.5	TUBETYPE	200	7.8	694	27.3	12	15	776	1705	3.5	50.0
	195/80D-15	HWY B	8	5.5	TUBETYPE	195	7.6	697	27.4	7	9	775	1705	4.2	60.0
	9.00-15	HWY F	8	6.5	TUBETYPE	255	10.0	865	34.0	10	13	1100	2420	3.5	50.0
17.5"	9.00-16	HWY F	8	6.5	TUBETYPE	255	10.0	898	35.3	12	15	1210	2660	3.5	50.0
	215/75-17.5	HWY G	12	6.8	TUBETYPE	215	8.4	780	30.7	8	10	2120	4665	6.5	92.0
	215/75-17.5	HWY G	16	6.8	TUBETYPE	215	8.4	780	30.7	8	10	2650	5830	9.0	128.0
	225/75-17.5	HWY G	16	6.8	TUBETYPE	225	8.8	795	31.3	8	10	2900	6380	9.0	128.0
	235/75-17.5	HWY G	16	6.8	TUBETYPE	235	9.3	810	31.9	8	10	3400	7480	9.0	128.0

VINTAGE VEHICLE TYRES

10"	8.25-10	HWY H	8	6.0	TUBETYPE	210	8.3	675	26.5	10	13	1575	3465	5.0	71.0
19"	5.00-19	HWY I	6	3.0	TUBETYPE	137	5.3	746	29.3	5	5	670	1475	3.8	54.0
	6.00-19	HWY I	8	3.62	TUBETYPE	160	6.3	800	31.5	6	6	925	2035	4.2	60.0
7.00-19	7.00-19	HWY I	10	5.0	TUBETYPE	194	7.6	860	33.8	7	7	1660	3650	4.8	68.0
	8.00-19	HWY I	10	5.0	TUBETYPE	222	8.7	910	35.2	6	6	1860	4092	4.8	68.0

LAWN & GARDEN TYRES

- The tough tires withstand long hours of cutting leaving trace of their path.
- Unmatched stability, durability and puncture resistance.
- Strong sidewall and long service life thanks to the use of wear resistant tread compound.



	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
4"	2.80/2.50-4	A	4	2.0	TUBETYPE	70	2.7	220	8.6	103	4.1	661	26.0	3	4	95	200	1.4	19
	3.00-4	B	4	2.0	TUBETYPE	85	3.3	260	10.2	122	4.8	783	30.8	3	4	110	250	1.6	22
6"	4.10/3.50-4	C	4	3.0	TUBETYPE	105	4.1	281	11.0	132	5.2	847	33.3	3	4	160	350	1.6	22
	13X5.00-6	D	4	3.5	TUBELESS	130	5.1	317	12.5	144	5.7	943	37.1	3	4	200	450	2.2	31
6"	15X6.00-6	D	6	4.5	TUBELESS	155	6.1	366	14.4	159	6.3	1059	41.7	5	6	330	725	2.5	35
	15X6.00-6	D	10	4.5	TUBELESS	155	6.1	366	14.4	159	6.3	1059	41.7	5	6	400	900	3.5	50
8"	16X6.50-8	D	6	5.0	TUBELESS	170	6.7	406	16.0	182	7.0	1183	47.0	5	6	360	800	3.0	42
	16X6.50-8	D	10	5.0	TUBELESS	170	6.7	406	16.0	182	7.0	1183	47.0	5	6	430	950	4.0	56

GOLF CART TYRES

- Design with a smooth wide profile and rounded shoulders for smooth sure footed ride.
- Superior Tread compound for longer life.
- Dual application tire intended for use on utility, golf as well as a wide variety of trailer applications.



	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
6"	18X8.50-8	E	6	5.5	TUBELESS	215	8.5	460	18.1	202	8.0	1334	53.0	6	8	568	1250	4.5	63
10"	20.5X8.00-10	F	10	6.0	TUBELESS	203	8.0	528	20.8	223	8.8	1450	57.1	7	9	705	1550	6.0	85

SPORTS GROUND TYRES

- Unique tyre specifically designed for sports ground.
- Suitable for cricket, football, baseball & hockey grounds.



	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(bar)	(psi)
8"	4.00-8	SM	4	3.75	TUBELESS	122	4.8	420	16.6	1.2	17



INDUSTRIAL TYRES



SKID STEER TYRES

L5 - Extra deep tread with sturdy lug design. Strong casing with heat and cut resistant tread compound provides longer life. Extra thick sidewall with rim guard gives protection against damages.



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
16.5"	10-16.5	L 5	12	8.25	TUBELESS	259	10.2	798	31.4	366	14.4	2337	92.0	34.0	43.0	2180	4806	4.5	60
	12-16.5	L 5	14	9.75	TUBELESS	307	12.1	838	33.0	384	15.1	2515	99.0	35.0	44.0	2765	6083	4.9	70
17.5"	14-17.5	L 5	14	10.5	TUBELESS	358	14.1	935	36.8	427	16.8	2743	108.0	35.0	44.0	3900	8580	5.5	80

ASFALTO - Deeper depth tyre tread for longer life. Bigger and sturdier blocks. Excellent chip & tear resistance compound. Extra thick sidewall with rim guard gives protection against damages



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
16.5"	10-16.5	ASFALTO	12	8.25	TUBELESS	267	10.5	790	31.1	356	14.0	2337	92	30	37	2180	4796	5.3	75
	12-16.5	ASFALTO	14	9.75	TUBELESS	325	12.8	856	33.7	381	15.0	2514	99	34	43	2765	6083	4.9	70

L4 - Deep tread, extra thick sidewall & tough casing ensures longer life. Silica & natural rubber base compound provides greater chip & tear resistance.

L4



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
16.5"	10-16.5	L 4	12	8.25	TUBELESS	268	10.5	790	31.1	356	14.0	2286	90.0	30	38	2140	4700	5.2	74
	12-16.5	L 4	14	9.75	TUBELESS	325	12.8	866	34.1	381	15.0	2438	96.0	30	38	2765	6083	5.2	74

SKS B - Premium conventional skid steer tyre with deeper tread depth, premium compound, larger tread lugs & Heavier sidewall.

SKS B



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
16.5"	10-16.5	SKS B	8	8.25	TUBELESS	268	10.5	795	31.3	356	14.0	2286	90.0	16	20	1875	4125	4.2	60
		SKS B	10	8.25	TUBELESS	268	10.5	795	31.3	356	14.0	2286	90.0	16	20	2140	4700	5.2	74
	12-16.5	SKS B	10	9.75	TUBELESS	325	12.8	855	33.6	381	15.0	2438	96.0	20	25	2545	5560	4.5	64
		SKS B	12	9.75	TUBELESS	325	12.8	855	33.6	381	15.0	2438	96.0	20	25	2765	6083	5.2	74

SKS - Premium tyre with extra deep tread & thick sidewalls providing better traction, puncture resistance and longer life. Specially designed rim guard ensures greater protection against flats & wheel damage in the rim flange area.



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
12"	23X8.50-12	SKS	6	7.0	TUBELESS	216	8.5	584	23.0	254	10.0	1727	68.0	12	15	822	1808	3.5	50
15"	27X8.50-15	SKS	8	7.0	TUBELESS	218	8.6	676	26.6	305	12.0	2006	79.0	12	15	1314	2890	4.2	60
16.5"	31X13-16.5	SKS	14	9.75	TUBELESS	330	12.9	805	31.6	356	14.0	2337	92.0	19	24	2435	5350	4.8	68
	33X15.5-16.5	SKS	14	12.0	TUBELESS	394	15.5	838	33.0	381	15.0	2464	97.0	19	24	3152	6935	5.2	74
17.5"	14-17.5	SKS	14	10.5	TUBELESS	350	13.7	940	37.0	406	16.0	2743	108.0	26	33	3900	8580	5.4	77
19.5"	15-19.5	SKS	14	11.8	TUBELESS	401	15.8	1036	40.7	457	18.0	3048	120.0	26	33	4570	10054	5.6	79

SKS A - Widewall tyre with side wall and rim guard protectors, meant for the value conscious performance oriented applications.



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)		
16.5"	10-16.5	SKS A	10	8.25	TUBELESS	268	10.5	795	31.3	356	14.0	2286	90.0	15	19	2140	4700	5.2	74
	12-16.5	SKS A	12	9.75	TUBELESS	312	12.3	825	32.5	381	15.0	2438	96.0	16	20	2765	6083	5.2	74

DRIVE WHEEL

R 3 TYRES

R 3



	SIZE	PATTERN	PLY RATING	RIM WIDTH		TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)	(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
26"	18.4-26	R 3	12	16.0		TUBELESS	475	18.7	1430	56.3	635	25.0	4140	163.0	24	30	3006	6615	2.3	33
	23.1-26	R 3	8	20.0		TUBELESS	587	23.1	1560	61.4	686	27.0	4547	179.0	26	33	2900	6380	1.1	16
		R 3	12	20.0		TUBELESS	587	23.1	1560	61.4	686	27.0	4547	179.0	26	33	3650	8050	1.7	25
		R 3	16	20.0		TUBELESS	587	23.1	1560	61.4	686	27.0	4547	179.0	26	33	4375	9625	2.3	33

EXCAVATOR TYRES

- Speedways Excavator Tyres are designed for heavy duty service.
- Specially engineered tread pattern provides excellent traction, good self cleaning as well as good on the road drive ability.

TRACCIÓN



	SIZE	PATTERN	PLY RATING	RIM WIDTH		TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY 50KPH / 30MPH MAX LOAD		INFLATION PRESSURE	
				STANDARD	ALTERNATIVE		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
				(inch)	(inch)															
20"	8.25-20	TRACCIÓN	14	6.5	7.0	TUBETYPE	236	9.3	980	38.6	457	17.6	2972	117.0	18	23	2064	4540	6.9	98
	9.00-20	TRACCIÓN	14	7.0	7.5	TUBETYPE	257	10.1	1038	40.9	483	19.0	3073	121.0	20	25	2505	5510	7.2	102
	10.00-20	TRACCIÓN	16	7.5	8.0	TUBETYPE	278	10.9	1075	42.3	508	20.0	3175	125.0	24	30	3007	6615	7.7	109

INDUSTRIAL TRACTOR TYRES

- Extra wide lugs designed to resist buckling, tearing & cracking.
- Excellent tread wear and road ability, the laterally designed lugs result in even wear.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
			(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
15"	11L-15	F 3	10	8.0	TUBELESS	280	11.0	813	32.0	355	14.0	2360	93.0	11	14	1182	2600	3.6	52
16"	11L-16	F 3	12	8.0	TUBELESS	280	11.0	820	32.3	381	15.0	2438	96.0	11	14	1250	2750	4.4	62
		F 3	14	8.0	TUBELESS	280	11.0	820	32.3	381	15.0	2438	96.0	11	14	1375	3025	4.9	70
18"	12.5/70-16	IMP	14	10.0	TUBELESS	315	12.4	853	33.6	381	15.0	2590	102.0	20	25	1648	3625	2.7	38
	10.5/80-18	MPT	10	9.0	TUBELESS	275	10.8	910	35.8	406	16.0	2667	105.0	23	29	1950	4300	3.7	53
18"	12.5/65-18	MPT	12	9.0	TUBELESS	305	12.0	950	37.4	415	16.3	2780	109.5	23	29	2450	5390	3.6	51
	12.5/80-18	MPT	12	9.0	TUBELESS	308	12.1	988	38.9	432	17.0	2896	114.0	24	30	2650	5825	3.7	53
18"	12.5/80-18	MPT	16	9.0	TUBELESS	308	12.1	988	38.9	432	17.0	2896	114.0	24	30	3150	6925	4.9	70
		L 5	16	9.0	TUBELESS	305	12.0	975	38.4	432	17.0	2896	114.0	35	44	2650	5830	3.9	55
18"	15.5/60-18	IMP	14	13.0	TUBELESS	401	15.8	950	37.4	432	19.0	2870	113.0	22	28	2405	5292	2.7	38
	17.5/65-20	IMP	14	14.0	TUBELESS	450	17.7	1090	42.9	483	19.0	3302	130.0	25	31	3202	7045	2.5	35
24"	16.9-24	R 4	12	15.0	TUBELESS	440	17.3	1310	51.5	584	23.0	3861	152.0	28	35	3202	7150	2.6	37
	17.5L-24	R 4	12	15.0	TUBELESS	445	17.5	1270	50.0	559	22.0	3683	145.0	28	35	3150	6950	2.7	38
24"	18.4-24	R 4	12	16.0	TUBELESS	472	18.4	1375	54.1	603	32.7	4043	159.0	28	35	3350	8200	2.3	36
	19.5L-24	R 4	12	17.0	TUBELESS	495	19.5	1325	51.9	584	23.0	3835	151.0	28	35	3450	7600	2.3	33
24"	19.5L-24	R 4	16	17.0	TUBELESS	495	19.5	1325	51.9	584	23.0	3835	151.0	28	35	4136	9100	3.1	44
		L 5	16	17.0	TUBELESS	490	19.3	1298	51.1	589	23.2	3835	151.0	38	48	4136	9100	2.6	38
24"	21L-24	R 4	12	18.0	TUBELESS	533	21.0	1377	54.2	610	24.0	3988	157.0	29	36	3882	8540	2.3	33
	18.4-26	R 4	12	16.0	TUBELESS	475	18.7	1425	56.1	635	25.0	4191	165.0	30	38	4000	8800	2.5	36
26"	18.4-26	R 4	16	16.0	TUBELESS	475	18.7	1425	56.1	635	25.0	4191	165.0	30	38	4375	9625	2.9	41
		R 4	12	15.0	TUBELESS	440	17.3	1410	55.5	635	25.0	4140	163.0	30	38	3550	7800	2.5	36
28"	16.9-28	R 4	12	15.0	TUBELESS	440	17.3	1410	55.5	635	25.0	4140	163.0	30	38	3550	7800	2.5	36
30"	16.9-30	R 4	12	15.0	TUBELESS	440	17.3	1460	57.5	660	26.0	4216	166.0	30	38	3700	8140	2.5	36

EARTHMOVER TYRES

- The special non-directional tread design formulated with silica based tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions.



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		
					(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
20"	9.00-20	E-3	18	7.5	TUBETYPE	260	10.2	1035	40.7	476	18.7	3056	120.3	18	23	2325	5115	7.2	102
	10.00-20	E-3	20	8.0	TUBETYPE	275	10.8	1075	52.3	494	19.4	3171	124.8	20	25	2690	5918	7.2	102
24"	14.00-24	E-3	24	10.0	TUBELESS	375	14.7	1368	53.8	635	25.0	4039	159.0	25	31	5150	11350	5.7	81
25"	14.00-25	E-3	24	10.0	TUBELESS	375	14.8	1375	54.1	635	25.0	4039	159.0	25	31	5150	11350	5.7	81
	15.5-25	E-3	12	12.0	TUBELESS	394	15.5	1278	50.3	569	22.4	3658	144.0	25	31	3250	7150	2.5	36
		E-3	16	12.0	TUBELESS	394	15.5	1278	50.3	569	22.4	3658	144.0	25	31	3650	8050	3.0	42
	17.5-25	E-3	16	14.0	TUBELESS	435	17.0	1345	52.9	635	25.0	3955	157.0	28	35	4250	9350	4.9	69
	17.5-25	E-3	20	14.0	TUBELESS	435	17.0	1345	52.9	635	25.0	3955	157.0	28	35	5011	11025	5.8	83
	20.5-25	E-3	16	17.0	TUBELESS	531	20.9	1485	58.5	686	27.0	4394	173.0	31	39	5461	12015	3.6	51
	20.5-25	E-3	20	17.0	TUBELESS	531	20.9	1485	58.5	686	27.0	4394	173.0	31	39	6014	13230	4.6	65
	23.5-25	E-3																	

UNDER DEVELOPMENT

INDUSTRIAL & LIFT TRUCK TYRES

- Premium tyre, designed for heavy duty service on forklift trucks, material handling & mining equipment.
- The deep tread, extra thick sidewalls & tough casing provide exceptional durability & minimise the risk of punctures & accidental damages.
- Silica & natural rubber in tread compound provides greater chip & tear resistance.
- Specially designed rim guard ensures protection against flats & wheel damages in the rim flange area.



SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		
					(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)	
8"	4.80/4.00-8	TRA	8	3.0	TUBETYPE	115	4.6	414	16.3	7	9	800	1750	9.0	128
	5.70/5.00-8	TRA	10	3.0	TUBETYPE	132	5.2	467	18.3	7	9	1415	3100	10.0	142
9"	6.90/6.00-9	TRA	10	4.0	TUBETYPE	160	6.3	540	21.2	10	13	1885	4150	10.0	142
10"	6.50-10	TRA	12	5.0	TUBETYPE	180	7.0	595	23.4	11	14	2145	4725	9.0	128
12"	7.00-12	TRA	14	5.0	TUBETYPE	200	7.8	690	27.1	12	15	2755	6050	9.0	128
13"	23x5	TRB	10	4.0	TUBETYPE	155	6.1	635	25.0	10	13	1985	4375	8.1	115
	7.50-15	TRA	16	6.0	TUBETYPE	212	8.4	772	30.4	14	18	3640	8000	9.3	131
15"	28x9-15	TRA	14	7.0	TUBETYPE	215	8.5	720	28.3	16	20	3770	8300	9.0	128
	8.25-15	TRA	16	6.5	TUBETYPE	240	9.4	855	33.7	14	18	4615	10150	9.3	131

MULTI PURPOSE TRUCK (MPT) TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.




RIM SIZE	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBE TYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
15.3"	10.0/75-15.3	MPT	10	9.0	TUBELESS	258	10.2	774	30.5	356	14.0	2311	91.0	21	26	1500	3300	3.9	57
		MPT	14	9.0	TUBELESS	258	10.2	774	30.5	356	14.0	2311	91.0	21	26	1900	4200	5.5	80
		MPT	18	9.0	TUBELESS	258	10.2	774	30.5	356	14.0	2311	91.0	21	26	2200	4875	7.1	75
	11.5/80-15.3	MPT	10	9.0	TUBELESS	292	11.5	868	34.2	381	15.0	2564	101.0	21	26	1900	4200	3.4	49
		MPT	14	9.0	TUBELESS	292	11.5	868	34.2	381	15.0	2564	101.0	21	26	2430	5350	4.8	69
		MPT	18	9.0	TUBELESS	292	11.5	868	34.2	381	15.0	2564	101.0	21	26	2800	6175	6.0	87
18"	10.5-18	MPT	10	9.0	TUBELESS	269	10.6	904	35.6	406	16.0	2692	106.0	21	26	1955	4301	3.8	54
	12.5-18	MPT	10	11.0	TUBELESS	325	12.8	990	39.0	457	18.0	2946	116.0	21	26	2070	31554	3.0	43
		MPT	12	11.0	TUBELESS	325	12.8	990	39.0	457	18.0	2946	116.0	21	26	2245	4939	3.5	50
19.5"	18-19.5	MPT	16	14.0	TUBELESS	460	18.1	1105	43.5	508	20.0	3277	129.0	25	31	4240	9328	5.0	85
		MPT	18	14.0	TUBELESS	460	18.1	1105	43.5	508	20.0	3277	129.0	25	31	5460	12012	7.3	105
20"	10.5-20	MPT	10	9.0	TUBELESS	270	10.6	955	37.6	457	18.0	2870	113.0	21	26	2070	3975	3.9	54
	12.5-20	MPT	10	11.0	TUBELESS	325	12.8	1039	40.9	483	19.0	3099	122.0	21	26	2130	4686	3.0	43
		MPT	12	11.0	TUBELESS	325	12.8	1039	40.9	483	19.0	3099	122.0	21	26	2300	5060	3.5	51
		MPT	14	11.0	TUBELESS	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	2300	5060	2.5	36
	MPT	18	11.0	TUBELESS	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	2790	6138	3.5	51	
	16.0/70-20	MPTA	14	13.0	TUBELESS	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	3135	6897	4.5	63
22.5"	18-22.5	MPTA	12	14.0	TUBELESS	465	18.3	1188	46.8	533	21.0	3530	139.0	28	35	4440	9770	4.5	80
24"	16.0/70-24	MPTB	14	13.0	TUBELESS	404	15.9	1184	46.6	345	21.0	3530	139.0	29	36	3550	7810	3.5	51

COMPACTOR TYRES

- Speedways compactor tyres are engineered to provide equal distribution of ground pressure across the tyre & to give optimum compaction.
- Tread compound specially formulated to endure high temperatures and minimize loose materials sticking to tyres.

C1

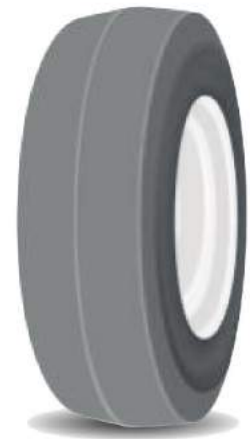

	SIZE	PATTERN	PLY RATING	RIM WIDTH		TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		LOAD CAPACITY				INFLATION PRESSURE	
				STANDARD	ALTERNATIVE		(mm)	(inch)	(mm)	(inch)	8KPH / 5MPH MAX LOAD		16KPH / 10MPH MAX LOAD		(bar)	(psi)
				(inch)	(inch)						(kg)	(lbs)	(kg)	(lbs)		
15"	7.50-15	C-1	6	6.0	6.5	TUBETYPE	226	8.9	790	31.1	1770	3894	1415	3113	3.8	54
		C-1	14	6.0	6.5	TUBETYPE	226	8.9	790	31.1	2750	6050	2225	4895	7.8	110
8.5/90-15K	7.50-15	C-1	6	6.0	6.5	TUBELESS	231	9.1	785	30.9	1770	3894	1415	3113	3.4	48
		C-1	14	6.0	6.5	TUBELESS	231	9.1	785	30.9	1770	3894	1415	3113	3.4	48
20"	9.00-20	C-1	12	7.0	7.5	TUBETYPE	275	10.8	1016	40.0	4060	8932	3245	7139	6.2	88
		C-1	14	7.0	7.5	TUBETYPE	275	10.8	1016	40.0	4420	9724	3540	7788	7.2	102
11.00-20	9.00-20	C-1	16	8.0	8.5	TUBETYPE	305	12.0	1082	42.6	5440	11968	4350	9570	7.2	102
		C-1	18	8.0	8.5	TUBETYPE	305	12.0	1082	42.6	5910	13002	4730	10406	8.3	118

GRADER (G2) TYRES

- Rugged sturdy tyres for drive wheels of off-the-road equipment.
- Tough carcass and special trade compound with weather & ozone resistant properties to withstand cuts, snags & bruises in the most severe operating conditions.
- An open spaced traction pattern with self cleaning property provides traction capability, ideally suited for graders.

G2 / L2



	SIZE	PATTERN	PLY RATING	RIM WIDTH	TUBETYPE/TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				(inch)		(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
24"	13.00-24	G2/L2	12	8.0	TUBELESS	341	13.4	1280	50.4	584	23.0	3785	149.0	25	31	2725	6000	3.0	43
		G2/L2	16	8.0	TUBELESS	341	13.4	1280	50.4	584	23.0	3785	149.0	25	31	3000	6600	3.5	50
14.00-24	13.00-24	G2/L2	12	10.0	TUBELESS	375	14.7	1350	53.1	610	23.0	4013	158.0	25	31	3075	6750	2.8	40
		G2/L2	16	10.0	TUBELESS	375	14.7	1350	53.1	610	24.0	4013	158.0	25	31	3650	8050	3.8	54



**TRUCK & LIGHT TRUCK
TYRES**

TRUCK & LIGHT TRUCK TYRES





	SIZE	PATTERN	PLY RATING	RIM WIDTH		TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE	
				STANDARD	ALTERNATIVE		(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
				(inch)	(inch)											
10"	5.00-10	HWY J	10	3.5	4.0	TUBETYPE	154	6.1	530	20.9	6	8	450	990	21.1	300
12"	4.50-12	HWY J	8	3.0	3.5	TUBETYPE	127	5.0	545	21.4	6	8	415	913	28.1	400
		HWY J	10	3.0	3.5	TUBETYPE	127	5.0	545	21.4	6	8	475	1045	35.2	500
14"	5.00-12	HWY J	10	3.5	4.0	TUBETYPE	143	5.6	568	22.3	7	9	500	1100	29.5	420
		HWY K	10	4.0	4.5	TUBETYPE	145	5.7	642	25.2	12	15	580	1276	29.5	420
14"	6.00-14	HYWL	8	4.5	5.0	TUBETYPE	170	6.7	680	26.8	6	8	683	1502	29.5	420
		HWY L	10	4.5	5.0	TUBETYPE	170	6.7	680	26.8	6	8	785	1727	37.3	530
		HWY L	8	4.5	5.0	TUBETYPE	180	7.1	705	27.7	6	8	785	1727	29.5	420
15"	6.50-14	HWY L	10	4.5	5.0	TUBETYPE	180	7.1	705	27.7	6	8	905	1990	37.3	530
		HWY M	8	4.0	4.5	TUBETYPE	160	6.3	695	27.3	12	15	720	1585	29.5	420
		HWY M	10	4.0	4.5	TUBETYPE	160	6.3	695	27.3	12	15	825	1815	37.3	530
15"	6.70-15	HWY M	8	4.5	5.5	TUBETYPE	165	6.5	710	28.0	12	15	820	1804	29.2	415
		HWY M	10	4.5	5.5	TUBETYPE	165	6.5	710	28.0	12	15	925	2035	37.3	530
		HWY N	12	5.5	6.0	TUBETYPE	205	8.1	770	30.3	15	19	1175	2585	43.6	620
15"	7.00-15	HWY M	12	5.5	6.0	TUBETYPE	205	8.1	770	30.3	15	19	1175	2585	43.6	620
		HWY O	12	5.5	6.0	TUBETYPE	205	8.1	770	30.3	15	19	1175	2585	43.6	620
		HWY M	12	6.0	6.5	TUBETYPE	215	8.5	780	30.7	12	15	1370	3015	44.3	630
16"	7.50-15	HWY M	14	6.0	6.5	TUBETYPE	215	8.5	780	30.7	12	15	1480	3255	49.3	700
		HWY P	10	4.5	5.0	TUBETYPE	174	6.9	752	29.6	10	13	720	1585	21.8	310
		HWY Q	10	4.0	5.0	TUBETYPE	174	6.9	752	29.6	10	13	70	1585	21.8	310
16"	6.50-16	HWY P	12	4.5	5.0	TUBETYPE	185	7.3	765	30.1	10	13	1080	2375	44.3	630
		HWY M	10	5.5	6.0	TUBETYPE	205	8.1	785	30.9	12	15	1100	2420	37.3	530
		HWY M	12	5.5	6.0	TUBETYPE	205	8.1	785	30.9	12	15	1215	2675	43.6	620
16"	7.00-16	HWY M	14	5.5	6.0	TUBETYPE	205	8.1	785	30.9	12	15	1315	2895	48.5	690
		HWY M	12	6.0	6.5	TUBETYPE	220	8.6	825	32.4	12	15	1405	3090	44.3	630
		HWY M	14	6.0	6.5	TUBETYPE	220	8.6	825	32.4	12	15	1505	3310	49.3	700
16"	7.50-16	HWY R	16	6.0	6.5	TUBETYPE	220	8.6	825	32.4	16	20	1580	3475	49.3	770
		HWY S	16	6.0	6.5	TUBETYPE	220	8.6	825	32.4	16	20	1580	3475	49.3	770
		HWY M	12	6.5	7.0	TUBETYPE	230	9.1	850	33.1	12	15	1530	3365	37.3	530
16"	8.25-16	HWY M	14	6.5	7.0	TUBETYPE	230	9.1	850	33.1	12	15	1705	3750	44.3	630
		HWY R	16	6.5	7.0	TUBETYPE	230	9.1	855	33.6	18	23	1855	4080	49.3	700
		HWY T	16	6.5	7.0	TUBETYPE	255	10.0	915	36.0	18	23	2390	5260	49.3	700
20"	9.00-16	HWY T	18	6.5	7.0	TUBETYPE	255	10.0	915	36.0	18	23	2475	5445	51.4	730
		HWY M	14	7.0	7.5	TUBETYPE	260	10.2	1025	40.3	13	16	2650	5830	55.6	790
		HWY R	16	7.0	7.5	TUBETYPE	260	10.2	1035	40.7	19	24	2800	6160	62.0	880
20"	10.00-20	HWY M	16	7.5	8.0	TUBETYPE	275	10.8	1060	41.7	14	18	3000	6600	57.0	810
		HWY O	18	7.5	8.0	TUBETYPE	275	10.8	1075	42.3	20	25	3150	6930	62.0	880
		HWY M	16	8.0	8.5	TUBETYPE	290	11.4	1082	42.6	14	18	3265	7185	57.0	810
24"	12.00-24	HWY U	18	8.5	9.0	TUBETYPE	313	12.3	1240	48.8	20	25	3850	8470	61.2	870
		HWY U	20	8.5	9.0	TUBETYPE	313	12.3	1240	48.8	20	25	4250	9350	69.0	980

MILITARY JEEP

4x4 TYRES

- Excellent for ON/OFF Road applications and ensures good all-round performance as well as good traction and durability in ON/OFF Road applications.
- Each tyre features bias belted construction for superior strength and impact resistance, these tyres are built to handle the toughest Off-Road conditions on the planet.



	SIZE	PATTERN	PLY RATING	RIM WIDTH (inch)	TUBETYPE/ TUBELESS	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE	
						(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(32nds)	(kg)	(lbs)	(bar)	(psi)
16"	6.00-16	MILITAR	6	4.5	TUBETYPE	174	6.6	752	29.6	330	13.0	2184	86.0	11	14	650	1450	3.2	45
	7.00-16	MILITAR	6	5.5	TUBETYPE	198	7.7	785	30.9	366	14.4	2362	93.0	12	15	815	1800	3.2	45
	7.50-16	MILITAR	8	6.0	TUBETYPE	220	8.7	825	32.5	374	14.7	2393	94.2	12	15	1080	2375	4.3	61
	7.50-16	MILITAR	12	6.0	TUBETYPE	220	8.7	825	32.5	374	14.7	2393	94.2	12	15	1405	3100	6.3	89
	7.50-16	MILITAR A	12	6.0	TUBETYPE	220	8.7	825	32.5	374	14.7	2393	94.2	12	15	1405	3100	6.3	89
19"	9.00-16	MILITAR	8	6.5	TUBETYPE	245	9.6	905	35.6	424	16.7	2768	109.0	15	19	1375	3025	3.5	49
	9.00-16	MILITAR	14	5.0	TUBETYPE	245	9.6	905	35.6	424	16.7	2768	109.0	15	19	1650	3625	7.4	105
	8.25-19	MILITAR	10	6.0	TUBETYPE	235	9.2	925	36.4	388	15.3	2483	97.8	14	18	1600	3520	4.2	60
20"	7.50-20	MILITAR	8	6.0	TUBETYPE	210	8.2	930	36.6	435	17.0	2692	106.0	14	18	1425	3150	5.2	73
	7.50-20	MILITAR	14	6.0	TUBETYPE	210	8.2	930	36.6	435	17.0	2692	106.0	14	18	1775	3900	7.4	105
	9.00-20	MILITAR	12	7.5	TUBETYPE	260	10.2	1035	40.7	483	19.0	3124	123.0	16	20	2050	4510	5.8	82
	12.00-20	MILITAR	18	8.5	TUBETYPE	320	12.6	1140	44.8	524	20.6	3360	132.3	19	24	3265	7975	7.6	107
24"	12.00-24	MILITAR																	

UNDER DEVELOPEMENT

THREE WHEELER TYRES



RANGER/ KRANTI
(TUBETYPE)

4.50-10



S-401 / LOADKING
(TUBETYPE)

4.50-10, 4.00-8



S-101 / R-101
(TUBETYPE)

4.00-8



S-501 / R-501
(TUBETYPE)

4.00-8



S-601
(TUBETYPE)

4.00-8

TWO WHEELER TYRES



COBRA R-5
(TUBELESS)

3.50-10, 90/100-10, 3.00-14,
2.50-16, 3.00-17, 100/90-17,
2.75-18, 3.00-18, 100/90-18, 3.50-19



COBRA R-3
(TUBETYPE)

3.00-17, 2.75-18, 3.00-18



COBRA
(TUBELESS)

3.00-17, 100/90-17, 120/80-17
2.75-18, 3.00-18, 100/90-18



BLACK HAWK
(TUBELESS)

100/90-18



STREET HAWK
(TUBETYPE)

3.00-18



SW-555
(TUBETYPE)

3.00-17, 3.00-18



COBRA F-1
(TUBELESS)

2.75-17, 90/90-17, 3.00-17,
2.75-18, 90/90-18, 2.25-19



SW-94
(TUBETYPE)

3.25-16, 3.50-18, 3.25-19



SW-666
(TUBETYPE)

3.00-18



MF-101
(TUBELESS / TUBETYPE)

2.50-16, 2.75-17, 2.75-18



MF
(TUBETYPE)

2.50-17, 2.50-18



LONG LIFE
(TUBETYPE)

2.25-16, 2.50-16, 2.25-17,
2.50-17, 2.50-18, 2.50-19



SW-101
(TUBETYPE)

3.50-10



SW-601
(TUBETYPE)

3.50-10



AVANTI
(TUBETYPE)

3.50-10



JZ-101
(TUBETYPE)

2.75-10, 3.00-10



CITY STAR
(TUBETYPE)

3.00-12, 90/90-12



ROAD STAR
(TUBETYPE)

3.00-14



**COLOURED
SIDEWALL TYRES**
(TUBELESS)

2.75-17, 3.00-17, 100/90-17
120/80-17, 2.75-18, 3.00-18,
100/90-18



**COLOURED
SIDEWALL TYRES**
(TUBETYPE)

2.75-17, 3.00-17, 100/90-17
120/80-17, 2.75-18, 3.00-18,
100/90-18




DOMINANDO EL TERRITORIO





FORCE

**DOMINANDO
EL TERRITORIO**

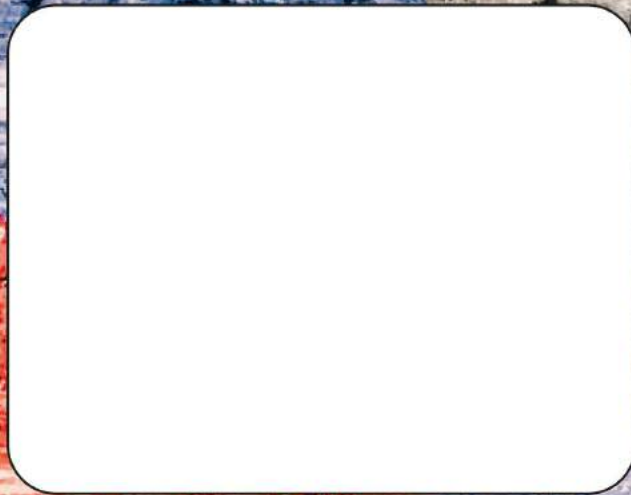

DISTRIBUIDOR AUTORIZADO